

Wall Lamp

INSTRUCTION MANUAL

Safety Warnings

- This product is only suitable for connection to a 220-240V~50Hz supply in accordance with current IEE wiring regulations, and should be installed in accordance with local Building Regulations. They are for domestic, indoor ceiling use only, and are **not** suitable for a Bathroom location.
- The light fitting should be connected to a lighting circuit protected by a 5 amp fuse (or a 6 amp miniature circuit breaker).
- Before installing your light fitting always switch off the mains supply, and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation. Ensure that no one else has access that would enable the supply to be inadvertently reconnected.
- **This is a Class 1 product and must be Earthed.** The terminal blocks are supplied according to requirements of the fitting.
- Never fit bulbs of a higher wattage than those specified on the label (as these may cause overheating and damage the fitting).
- If you are in any doubt about your competence please consult a qualified electrician.
- If any modification is made it will invalidate the warranty and may render the product unsafe.
- This product is dimmable when used with a dimmable bulb.

Care Information

Allow 10 minutes to cool before replacing, adjusting or cleaning.

Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Assembly/ User Instructions

Before you start

Please read these instructions carefully before fitting and retain for reference.

Check the packaging and make sure that you have all the required parts.

Follow each assembly step in order to prevent incorrect assembly.

Ensure that the product is fully assembled as illustrated before use.

The Light pack contains:

Light fitting.

Terminal connection block.

Fixing pack.

The following tools may be required:

Selection of cross and flat head screwdrivers.

Electric drill and assorted drill bits.

Wire strippers.

Electrical insulation tape.


Personal protection equipment

These assembly diagrams overleaf are intended as a guide – if in doubt consult a qualified electrician.

1. Decide on the position of the light fitting, or remove existing light fitting. Take a note of the position of the electrical connections. Ensure there is a solid mounting surface.
2. Detach the fixing bracket (A) from the wall back (B) by removing the finials (C) from the front of the product. - retain them for re-fitting later. Make sure the fixing bolts (D) are protruding through the front of the fixing bracket (A). Use the fixing bracket (A) as a template to mark the screw holes, and secure to the wall with appropriate screw fixings (E), making sure the bracket is correctly aligned.
3. Support your fitting and connect the house wiring to the terminal block (F) – see expanded wiring details below. Any loose terminal blocks – not secured to wall back – should always be covered with at least 2 layers of good quality insulation tape such that it is covered to at least 8mm on each side.

Assembly/ User Instructions Continued

4. Secure the wall back (B) over the fixing bracket (A) by using the finials (C) removed in Point 2. Ensure the wall back is correctly oriented with the lampholder facing downwards.
5. Fit the bulb (G - not supplied). **NOTE: Never fit bulbs of a higher wattage than those specified on the label (as these may cause overheating and damage the fitting). Use a soft cloth to handle G9 bulbs, avoid directly touching the bulbs as this will shorten their life.**
6. Gently slide the glass plate (H) into the bottom of the shade so that it rests on the tabs there.
7. Place the glass shade (I) onto the wall back (B) so that the hole in the metal strip above the shade (J) is flush with the hole in the top of the wall back (K). Secure in place with the supplied screw (L).
8. Turn on the power and test.

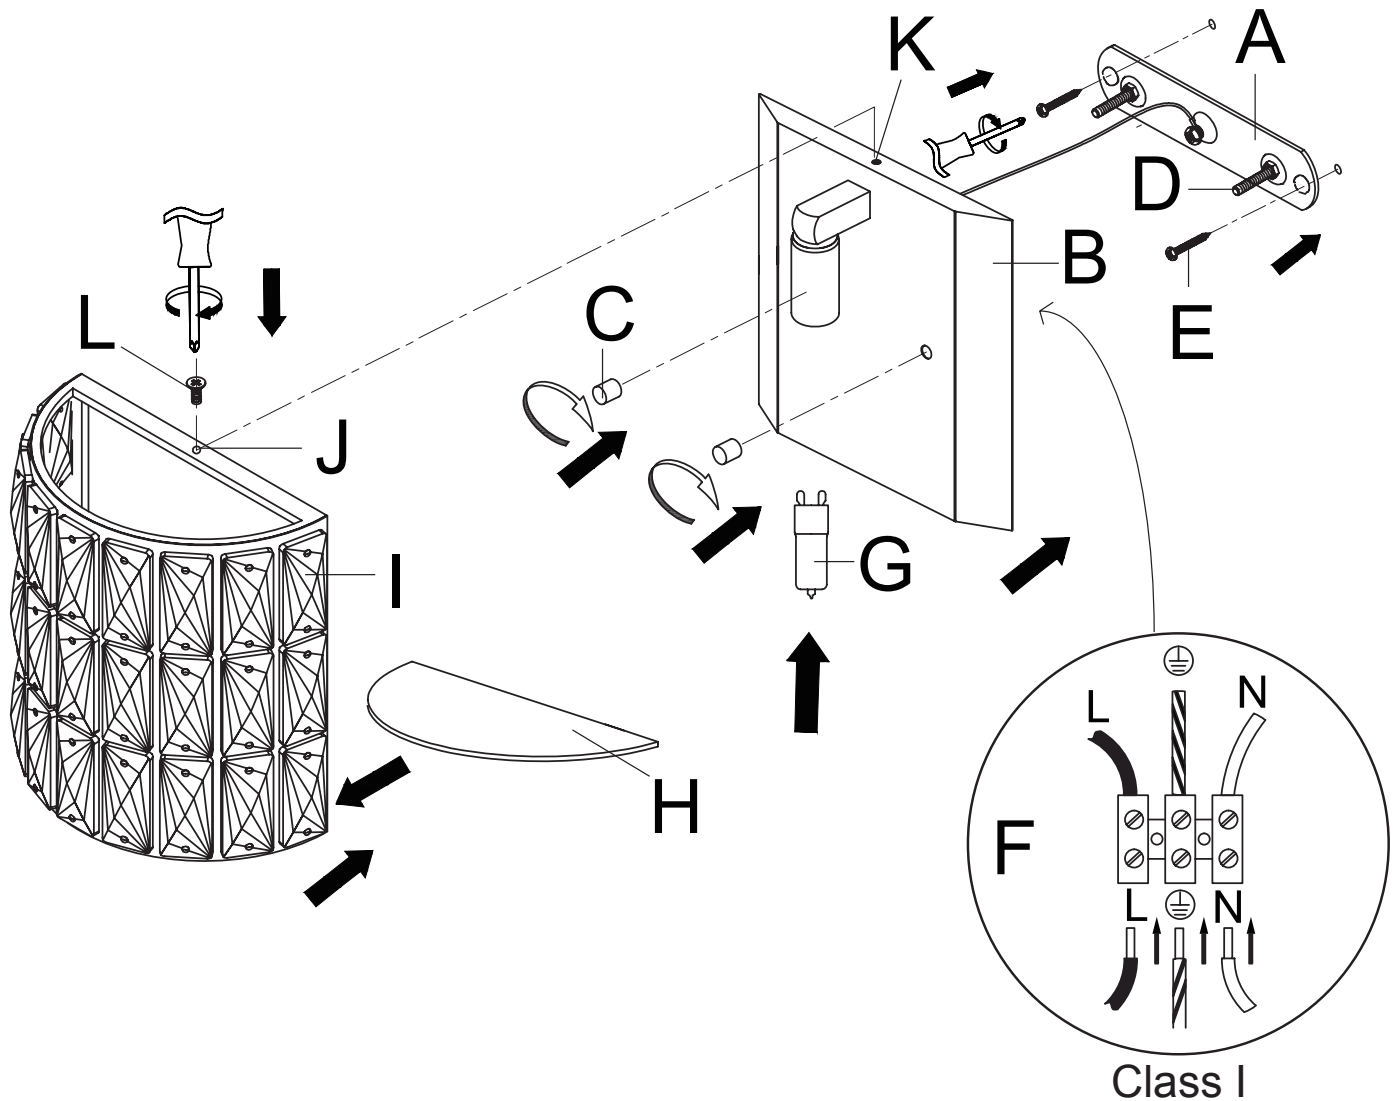

- EN Scan QR code for multi-language
- FR Scannez le code QR pour plusieurs langues
- ES Escanee el código QR para varios idiomas
- PL Zeskanuj kod QR dla wielu języków
- DE Scannen Sie den QR-Code nach mehreren Sprachen
- IT Scansiona il codice QR per multilingua



UK Manufacturer: BH17 7BY
 EU Manufacturer: Brilliant AG,
 Brilliantstrasse 1, D-27442 Gnarrenburg