

INSTRUCTION MANUAL

Safety Warnings

This product is only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring Regulations and should be installed in accordance to local UK Building Regulations and is for Domestic ceiling use only and is not suitable for a Bathroom location.

The light fitting should be connected to a lighting circuit protected by a 5 amp fuse (or a 6 amp miniature circuit breaker).

If in doubt we recommend you contact a qualified electrician. Before installing your light fitting always:

Switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation.

Ensure that no one else has access that would enable the supply to be inadvertently reconnected.

This product contains glass parts – be careful during handling and maintenance to avoid breakage.

Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

This fitting is heavy / awkward and you may require assistance in connecting it to the supply and securing it to the mounting surface. When fixing to the mounting surface ensure that the fixings used are appropriate for the mounting surface on which they are being used.

If any modification is made it will invalidate the warranty and may render the product unsafe.

Before you start

Please read these instructions carefully before fitting your new light and retain for reference.

Make sure that there are no pipes or cables beneath the mounting surface.

Check the packaging and make sure that you have all the required parts.

Follow each assembly step in order to prevent incorrect assembly.

Make sure all screws / nuts, including electrical connections etc are fully tightened before use.

This type of Light Fitting cannot be connected to a Dimmer.

The Light pack contains:

Light fitting with decorative glass balls.
Terminal connection block(s).

The following tools may be required:

Selection of cross and flat head screwdrivers.
Electric drill and assorted drill bits.
Wire strippers.
Electrical insulation tape.

These assembly diagrams are intended as a guide – if in doubt consult a qualified electrician.

Diagram A


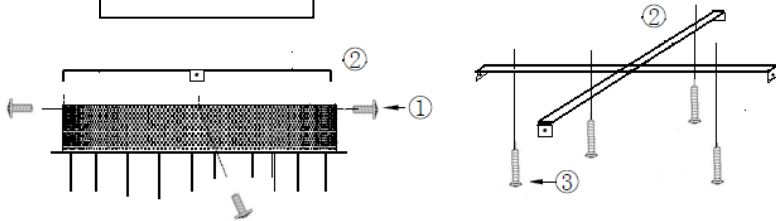


Diagram B

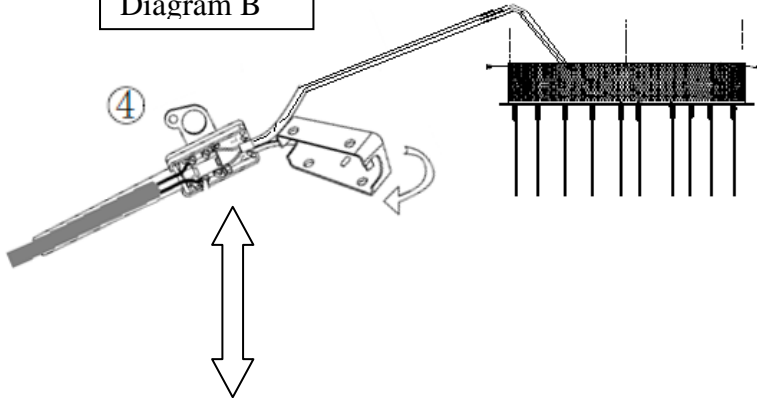

④ Details of terminal wiring.


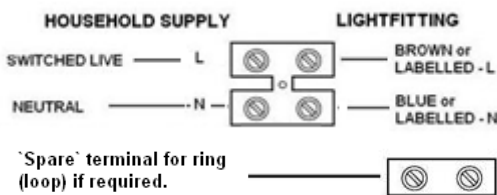


Diagram C

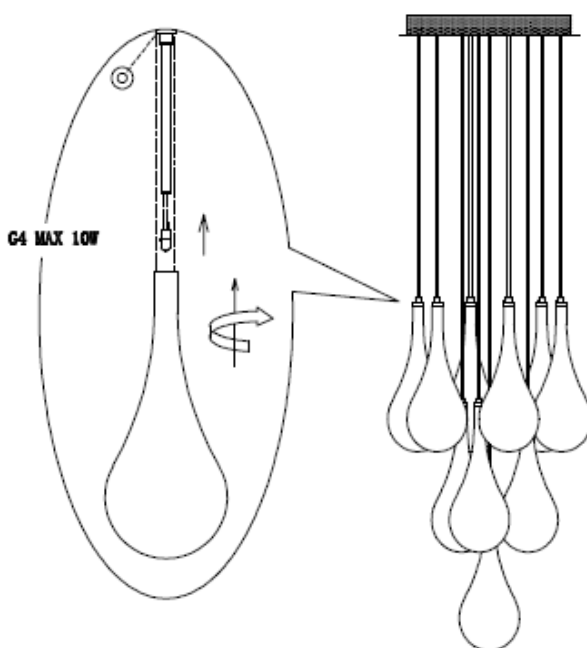

1. Decide on the position of the light fitting / or remove existing light fitting. Take a note of the position of the electrical connections. Ensure there is a solid mounting surface, preferably a wooden joist or joist bridge to support the weight of the light fitting.
2. **Diagram A.** Remove the fixing bracket, by undoing the 4 side screws (1), retain these for re-use.
3. Use the fixing bracket (2) as a template to mark the screw holes, mark the screw holes and secure to the ceiling with the screws (3) supplied.
4. **Diagram B.** The length of the `drops` may be reduced by shortening the cables. If you want to reduce the overall length of the fitting it is essential that this is done before the fitting is mounted to the ceiling and / or connected to the mains supply. To do this, undo the grub screws, under the ceiling cup, and push the cables into the ceiling cup until the desired length of the cables is reached. We recommend that the minimum distance between the ceiling cup and the top of the fitting is 100mm.
5. Support your fitting and connect the house wiring to the terminal block (4) – see also details of terminal wiring. **NOTE: This is a Class II fitting and must not be earthed. If you have any earth cables make sure that they are connected to each other – to maintain earth continuity throughout your property – and wrap the earth terminal and connections in 2 layers of good quality insulation tape and keep them away from the terminal connections of the fitting.** Open the terminal block box and take out the long tailed grommet, sliding it up the house supply cable. Cut and strip the cable and connect it to the terminal block as shown. Close the box. The additional single terminal block connector is used for the “loop” wires of the “Ring Circuit”. There may be more than one set of cables in the “loop” connections. This additional connector must be wrapped in 2 layers of good quality insulation tape to prevent the conductors touching the main terminal block connections or the metal of the fitting. **If there is a “Ring Circuit” and you do not understand the connections you must consult an electrician.**
6. Secure the fitting back onto the fixing bracket with the 4 side screws (1), removed in 2 above. Make sure that all the internal cables and connections are inside the Ceiling cup taking care not to trap or strain the internal cables.
7. **Diagram C.** Fit the bulbs – being careful not to touch them with your bare hands – use a cloth or gloves. **NOTE: Never fit bulbs of a higher wattage than those provided / recommended on the label (as this may cause over heating and damage the fitting).** Carefully secure the decorative glass ball assemblies onto the lamp holder positions being careful not to over tighten and risk damaging the glass shades.
8. Turn on the power and test.