


Edge and Salano Wall Light Fitting

INSTRUCTION MANUAL

Safety Warnings

- This product is only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring regulations, and should be installed in accordance with local building regulations. It is for indoor use only, and is suitable for a bathroom location.
- Before installing your light fitting always switch off the mains supply, and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation. Ensure that no one else has access that would enable the supply to be inadvertently reconnected.
- This is a Class I product, and **must** be Earthed. The terminal blocks are supplied according to requirements of the fitting.
- This product has special protection against the ingress of water, and is rated IP44.
- This product contains non-replaceable LEDs. If the LEDs become damaged, they cannot be replaced, and the product must be disposed. Do not attempt to remove the shade. This may damage the product & affect its IP rating.
- This light may be installed in Zones 1 and 2 and Outside Zones of a bathroom where water jets are not used for cleaning purposes. If installing in a bathroom, a 30mA RCD must be used in accordance with IEE Wiring Regulations and the Building Regulations. An electrician must be consulted if in any doubt about your own competency or meaning of bathroom “Zones”, “Equipotential Bonding” or “RCD”.
- If you are in any doubt about your competence please consult a qualified electrician.
- If any modification is made it will invalidate the warranty and may render the product unsafe.

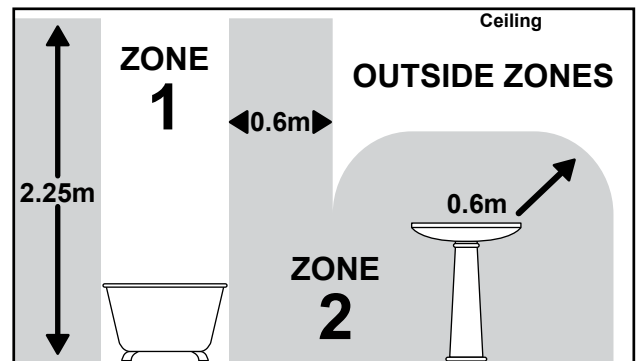

Care Information

- Allow 10 minutes to cool before replacing, adjusting or cleaning.
Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Assembly/ User Instructions

Before you start

Please read these instructions carefully before fitting and retain for reference. Check the packaging and make sure that you have all the required parts. Follow each assembly step in order to prevent incorrect assembly. Ensure that the product is fully assembled as illustrated before use.

The Light pack contains:

- Light fitting
- Terminal connection block(s)
- Fixing pack

The following tools may be required:

- Selection of cross and flat head screwdrivers.
- Electric drill and assorted drill bits.
- Wire strippers.

These assembly diagrams are intended as a guide – if in doubt consult a qualified electrician.

1. This product can be mounted vertically or horizontally. Make sure any drain hole is located at the bottom of the fitting when the product is attached to the wall. Decide on the position of the light fitting, or remove existing light fitting. Take a note of the position of the electrical connections. Ensure there is a solid mounting surface to support the weight of the light fitting.
2. Loosen the four side hex screws (A) to detach the wall back (B) using the hex key provided (C). Keep the screws safe for refitting later.
3. Attach the wall back to the wall using the screws (D), washers (E) and wall plugs (F) provided. Ensure there is adequate support at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The distance between the fixing holes for 78993 and 79923 is 200mm. For 78994 and 79924, the distance is 400mm.
4. Support your fitting and connect the house wiring to the terminal block (G). See step 4 in diagram overleaf.

NOTE: This is a Class I fitting and must be earthed.



Assembly/ User Instructions

5. Attach the product to the wall back by refitting the four side hex screws (A) set aside earlier with the supplied hex key (C).
6. Turn on the power and test.

Please note: the LEDs in this product are not replaceable. Do not attempt to remove the shade as this may damage the product and affect its IP protection.

