

Wall light Fitting

INSTRUCTION MANUAL

Safety Warnings

- This product is only suitable for connection to a 220-240V~50Hz supply in accordance with current IEE wiring regulations. It should be installed in accordance with local building regulations and is for domestic use only.
- Before commencing installation of your light fitting always switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker.
- This is a Class I product, and **must** be Earthed. The terminal blocks are supplied according to requirements of the fitting.
- Run supply wire from a 5-amp electrical supply protected by an RCD using double insulated 3-core cable of type H05RN-F 1.0mm² (not supplied) to selected site, ensuring it is adequately protected through the full length of the cable run, it must come out of the flat surface of the wall or steps in line with the entry to the fitting.
- Except where installed in a conduit or duct which provides equivalent protection against mechanical damage, a cable buried in the ground shall incorporate an earthed armour or metal sheath or both, suitable for use as a protective conductor, or be of insulated concentric construction. Buried cables shall be marked by cable covers or a suitable marking tape. Buried conduits and ducts shall be suitably identified. Buried cables, conduits and ducts shall be at a sufficient depth to avoid being damaged by any reasonably foreseeable disturbance of the ground.
- Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.
- This product is suitable for outdoor use, has special protection against the ingress of water, and is rated IP44.
- If you are in any doubt about your competence please consult a qualified electrician.
- If any modification is made it will invalidate the warranty and may render the product unsafe.
- If any part of the glass is broken or cracked then it must be replaced immediately to preserve the water ingress protection.

Care Information

Allow 10 minutes to cool before replacing, adjusting or cleaning.

Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Assembly/ User Instructions

Before you start

Please read these instructions carefully before fitting and retain for reference. Check the packaging and make sure that you have all the required parts. Follow each assembly step in order to prevent incorrect assembly. Ensure that the product is fully assembled as illustrated before use.

DO NOT CONNECT THIS PRODUCT TO A DIMMER SWITCH / EXTERNAL PIR UNIT.

The Light pack contains:

Light fitting.
Terminal connection block.
Fixing pack.

The following tools may be required:





Selection of cross and flat head screwdrivers.
Electric drill and assorted drill bits.
Wire strippers.
Electrical insulation tape.

These assembly diagrams are intended as a guide – if in doubt consult a qualified electrician.

1. Decide on the position of the light fitting, or remove existing light fitting. Note the position of the electrical connections. Ensure there is a solid mounting surface, preferably a brick wall, to support the weight of the light fitting.
2. Remove the fixing bracket, by undoing the 2 top screws (1), retain these for re-use.
3. Use the fixing bracket as a template to mark the screw holes(2), and secure to the wall with appropriate screw fixings (3), making sure the bracket is vertical. Take care to avoid damaging any concealed wiring or pipes.

Assembly/ User Instructions Continued

4. Support your fitting and connect the house wiring to the terminal block. The cable entry grommets must be securely in place to ensure that the water ingress protection is maintained. **NOTE: This is a class I fitting and must be earthed.** Secure the terminal box lid - again this is to ensure that water does not enter the terminal block.
5. Re-position the fitting over the wall bracket - MAKING SURE THAT THE FITTING IS CORRECT WAY UP AS PER THE ARROW INSIDFE THE BACK PLATE - and secure with the 2 side screws, removed previously. Make sure that all the internal cables and connections are inside the back plate taking care not to trap or strain the internal cables.
6. Turn on the power and test.

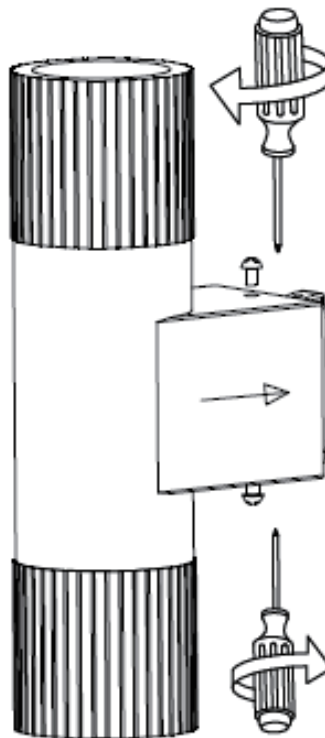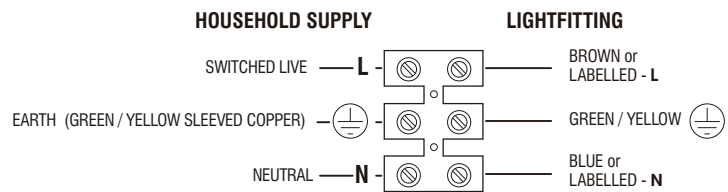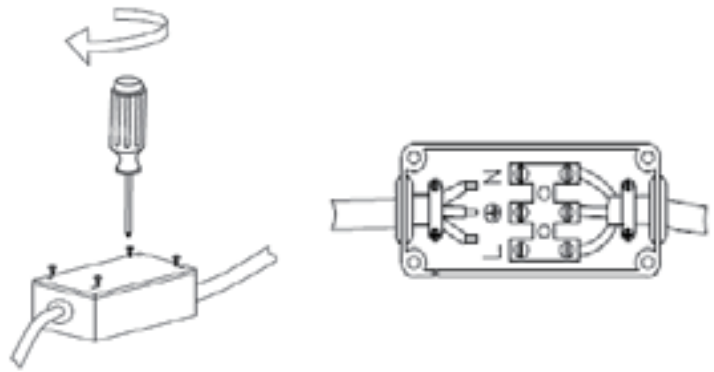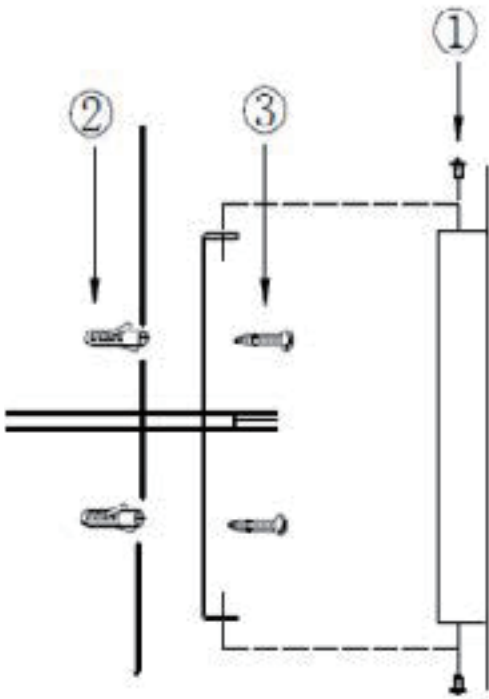

- EN Scan QR code for multi-language
- FR Scannez le code QR pour plusieurs langues
- ES Escanee el código QR para varios idiomas
- PL Zeskanuj kod QR dla wielu języków
- DE Scannen Sie den QR-Code nach mehreren Sprachen
- IT Scansiona il codice QR per multilingua