

## Assembly Instructions for Vienna Pendant

## New Classics Collection

Please read the instructions carefully before starting work and retain for future reference.

Always turn off the mains supply at the consumer unit, shut off the circuit breaker, or remove the circuit fuse before commencing installation.

This fixture should only be installed by a qualified electrician.

This fixture is suitable for indoor, non-bathroom, use only.


### Reducing the drop:

1. If you want to reduce the overall length of the fitting it is essential that this is done before the fitting is mounted to the ceiling, or connected to the mains supply.
2. Remove the chain links until the desired length is reached.
3. The cable must now be shortened and the excess cable cut and re-connected to the terminal block. Feed the cable up through the plastic bush and form a loop above the ceiling cup, moving the figure of 8 cable restraint down the exposed cable. **NOTE: The electric cable must always be longer than the chain to prevent strain being placed on the cable. If you are unsure about your ability to do this, we recommend you contact a qualified electrician.**

### Installation:

4. Affix the base of the stem (1) into the main body of the fitting, then fit the bulbs. **Note: Never fit bulbs of a higher wattage than stated on the lampholder**, as this may cause overheating and damage the fitting.
5. Loosen the cuff (2) from the top of the stem, and slide the shade (3) around it. Retighten the cuff.
6. Remove the two side screws (6) and retain the screws for re-use.
7. Using the fixing bracket as a template mark and make the fixing holes, then affix the bracket to the ceiling with appropriate fixings (4).
8. Support your fitting and connect the house wiring to the terminal block (5) – see expanded wiring detail. **NOTE: This is a Class I fitting and must be earthed.** The 4th terminal block connector is used for the “loop” wires of the “Ring Circuit”. There may be more than one set of cables in the “loop” connections. If there is a “Ring Circuit” and you do not understand the connections you must consult an electrician. Any loose terminal blocks – not secured to ceiling cup – should always be covered with 2 layers of good quality insulation tape.
9. Secure the ceiling cup over the bracket by using the screws (6) removed in Point 6.
10. Turn on the power and test.

### Extended Wiring Diagram

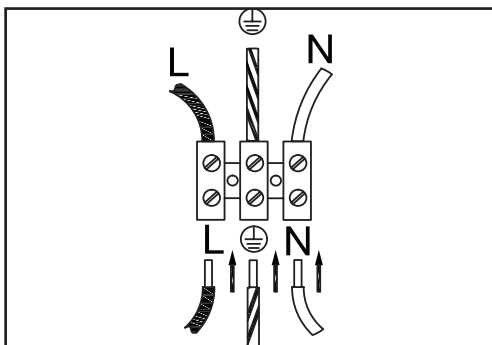

## Assembly Instructions for Vienna Pendant

## New Classics Collection

